



ERGO LIFT 2000 ROLL is the latest GYS innovation for lifting and moving vehicles, up to 2.6 tonnes. The ingenious folding knee-joint design allows direct lifting from the ground, without the need for ramps, which saves time and makes it extremely easy to use. It features 4 swivelling support arms with a patented automatic locking system that adapts to different types of chassis. With a lifting height of 1 m, this ergonomic lift allows you to work standing up around the vehicle with ease.

- Provides full access to the body of the vehicle for maintenance.
- Very compact: 10 cm on the ground in the lowered position.
- Maximises workshop access where space is limited.
- Mobile and easy to move with 4 wheels.




Work in a standing position to prevent musculoskeletal disorders (MSD).

	Without ramps
	2.6 T
	1 m

Knee-joint capable of lifting 2.6 tonnes from the ground up to 1 m, without ramps.

Solid, highly stable scissor structure.

Supplied with **8 rubber pads**

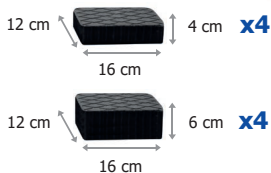

4 large clip-on wheels allow the lift to be converted into a mobile carriage. This means the vehicle can be easily moved around the workshop.

Maintenance-free, disconnectable hydropneumatic pump.



Supplied with stand (088047).




Handle to position the support arms with an **automatic locking system** (with or without load).

The glide can be moved along the load-bearing arms, giving better access to the underside of the vehicle.

Hydraulic safety system **with automatic scissor** lock in the event of hose rupture.

All axles are fitted with bronze bushes with **self-lubricating coating**, requiring no maintenance.

Options

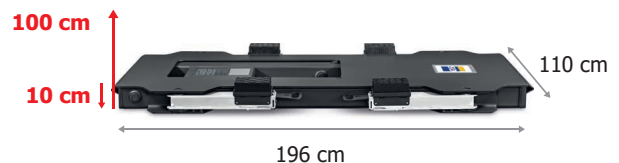

							IP			
maximum	minimum	maximum			max.			kg	product delivered on pallet	
2.6 T	10 cm	100 cm	2 min	55 sec.	8 bar	280 cm	IP54	420	460 kg (lift only)	